

9-Polige RS-232 Buchse mit RS-485 Belegung:

A(KL.28) – Pin 3

B(KL.29) – Pin 7

GND(KL.30) – Pin 5

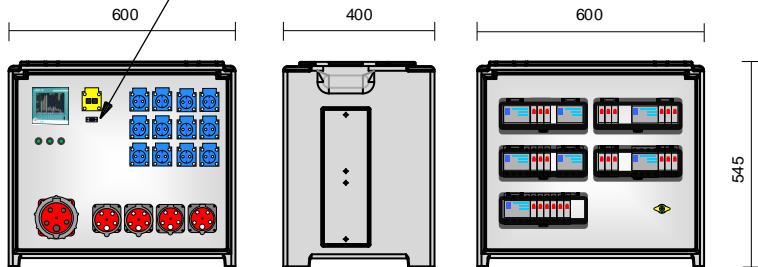


Tabelle1

FI1 - 32A	LS	LS	LS	FI2 - 32A	LS	LS	LS
	32A	32A	32A		leer	leer	leer

FI3 - 16A	LS	LS	LS	FI3 - 16A	LS	LS	LS
	32A	32A	32A		leer	leer	leer

FI4 - 16A	LS	LS	LS	FI5 - 16A - Schuko	LS	LS	LS
	16A	16A	16A		leer	leer	leer

FI6 - 16A - Schuko	LS	LS	LS	FI6 - 16A - Schuko	LS	LS	LS
	16A	16A	16A		leer	leer	leer

FI7 - 16A - Schuko	LS	LS	LS	LS	LS	LS	leer	leer
	16A	16A	16A	16A	16A	16A		

